



BOSS[®] GUTTER~SEAL

TYPICAL PROPERTIES


Uncured

| | |
|---|------------|
| Tack-Free Time | 15 min. |
| Cure Time at 75°F (24°C) and 50% RH (3/8" thickness) | 24 hours |
| Extrusion Rate | 400 g/min. |

Cured – Physical

| | |
|---|------|
| Elongation | 300% |
| Durometer Hardness, Shore A, points | 26 |
| Tensile Strength, psi | 250 |

*Primers may be required for certain substrates
 *Information on this data sheet is subject to change without notice and should not be used for writing specifications.
 For additional information on specific applications, contact Accumetric, LLC

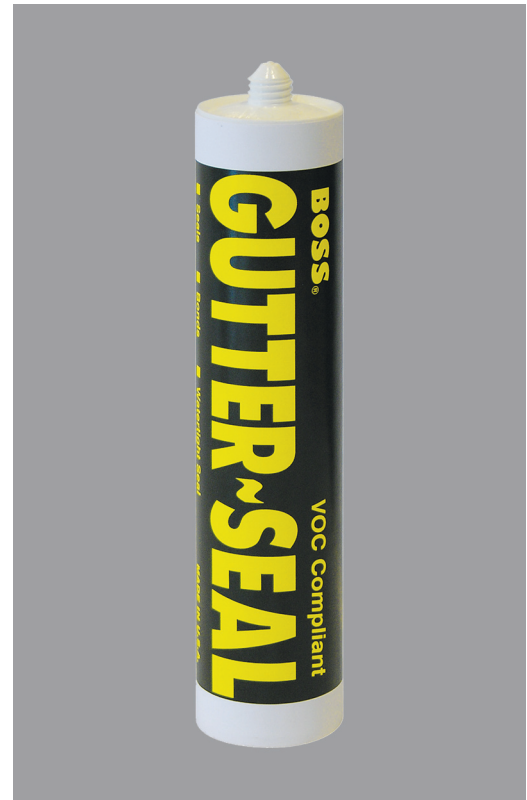

DESCRIPTION

BOSS[®] GUTTER~SEAL Sealant is a new VOC compliant sealant in all 50 states. **BOSS[®] GUTTER~SEAL** was designed without the harsh smells of solvents, it's non-flammable, with no shrinking. **BOSS[®] GUTTER~SEAL** is fast curing and provides permanent elastic adhesion to most surfaces.

BOSS[®] GUTTER~SEAL is recommended for sealing all types of gutters, downspouts, ducts and ventilators. **GUTTER~SEAL** is excellent for sealing seams, joints and cracks in gutter troughs, HVAC ducts and sheet metal. **BOSS[®] GUTTER~SEAL** cures on exposure to atmospheric moisture to form a durable flexible watertight seal. **BOSS[®] GUTTER~SEAL** can be applied and tooled in most weather conditions (-40° F to +140°F), maintains adhesion and will not crack.

FEATURES

- VOC Compliant in all 50 states
- No lasting odors
- No shrinkage
- Non-flammable
- Fast curing
- Permanent elastic seal
- Long 4" nozzle for hard-to-reach areas
- Guns as low as -40°F

HOW TO USE

Applying the Material – Tack-Free Time

BOSS® GUTTER-SEAL is supplied ready-to-use. Under pressure it flows readily from its container. The paste-like consistency makes it easy to work; a spatula or wooden paddle can be used for tooling the surface.

The cure progresses inward from the surface. At conditions of at least 75°F (24°C) and 50 percent relative humidity, the sealant forms a tack-free skin in 15-20 minutes. Tooling is not practical after this skin begins forming, and should be completed within 5-7 minutes of application, even though this may require alternate periods of applying and tooling. Likewise, if masking tape has been used to mark off an area, it should be removed before the tack-free skin forms.

CAUTION

DIRECT CONTACT OF UNCURED SEALANT IRRITATES EYES AND MAY IRRITATE SKIN. OVEREXPOSURE TO VAPOR MAY IRRITATE EYES, NOSE AND THROAT. Avoid eye and skin contact. Use with adequate ventilation. Do not handle contact lenses with sealant on hands. IN CASE OF EYE CONTACT, flush eyes with water for 15 minutes. Obtain medical attention. IN CASE OF SKIN CONTACT, remove from skin and flush with water. KEEP OUT OF REACH OF CHILDREN.

SHIPPING LIMITATIONS

None.

Reactive calculated VOC 45 g/L (<4.5% wt)

STORAGE AND SHELF LIFE

When stored in the original unopened containers at or below 90°F (32°C), **BOSS® GUTTER-SEAL** has a shelf life of 12 months from date of shipment. In Countries where high heat and humidity are a factor, special precautions must be taken. Store product in a covered, well-ventilated warehouse and avoid excessive heat conditions. Storage in high heat, high humidity conditions may reduce shelf life by up to 30%. Rotation of stock is an absolute necessity. Cartons should always be stacked upright with the nozzle tip pointed upwards. DO NOT stack cartons on their side. **NEVER** stack cartons more than 8 high. DO NOT store within 1 meter (4 feet) of roofline of the warehouse or storage building.

COLORS

BOSS® GUTTER-SEAL is available in clear, white and aluminum.

PACKAGING

BOSS® GUTTER-SEAL is available in standard caulking cartridges.

USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

The supplier warrants only that its products will meet its specifications. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. The user's exclusive remedy and the supplier's sole liability is limited to refund of the purchase price or replacement of any product shown to be otherwise than as warranted. The supplier will not be liable for incidental or consequential damages of any kind.

Suggestions of uses should not be taken as inducements to infringe any patents.

MADE IN U.S.A.

BOSS® PRODUCTS

Accumetric, LLC
350 Ring Road
Elizabethtown,
Kentucky 42701 USA
800-928-BOSS(2677)
TEL (270)769-3385
FAX (270)765-2412
Outside U.S.
TEL +1(270)769-3385
FAX +1(270)765-2412

Accumetric Asia Pacific, LTD
18 Kitpanit Bldg. 5th Floor
#502 Patpong Road
Suriyawong, Bangrak
Bangkok, 10500 Thailand
TEL (662)634-3060
FAX (662)634-3066

www.bossproducts.com